

AquaPro[®]

AquaCart

Simply wheel water delivery system to battery and water battery by switching on the tank.

12Volt Sealed Battery & Battery Charger

No access to plug needed. AquaCart waters battery with the switch of a button. Easy re-charge with battery charger.

15 Gallon Tank

Tank holds 15US gallon of water. Fill the tank with 'AquaPro Deioniser Station'

Quick Coupler & Flow Indicator

Couplers with flow indicator and in-line strainer serve as a quick and simple link between tank and single point watering system.

Submersible Pump

The pump inside the tank provides the right pressure for your AquaPro Single Point Watering System.

6ft Supply Hose

Batteries can be easily reached with a long hose.

Industrial wheels

Two robust wheels allow easy transport and manoeuvre.



When batteries are at hard to reach places it is more practical to take the water to the battery rather than the other way around. The AquaCart offers maximum convenience and flexibility for the user. It operates with a battery powered submersible pump and ensures fast filling. The pump is controlled by an ON/OFF switch with light. The unit only uses power while it is filling!

AquaCart

Water your battery by simply switching on the tank.

Easy to Use

Fill the tank with water (recommended with 'AquaPro Deioniser Station'), wheel the AquaCart to the battery, connect the couplers and switch on the tank. When the yellow balls in flow indicator stop spinning, simply disconnect. Wheel cart to the next battery.

On Board Battery Compartment

AquaCart is equipped with a rechargeable 12V DC sealed battery that operates the submersible pump inside the tank. The battery can be easily re-charged with the in-built charger.

Convenience and Flexibility


The two-wheeled cart is easily manoeuvred and stored. Tank can also be installed on other modes of transport like wheel dolly, etc.

Direct Connection to Battery

The purified water is delivered straight from the AquaCart to the battery.

ON/OFF Switch with light

The red LED switch indicates that pump is in operation.

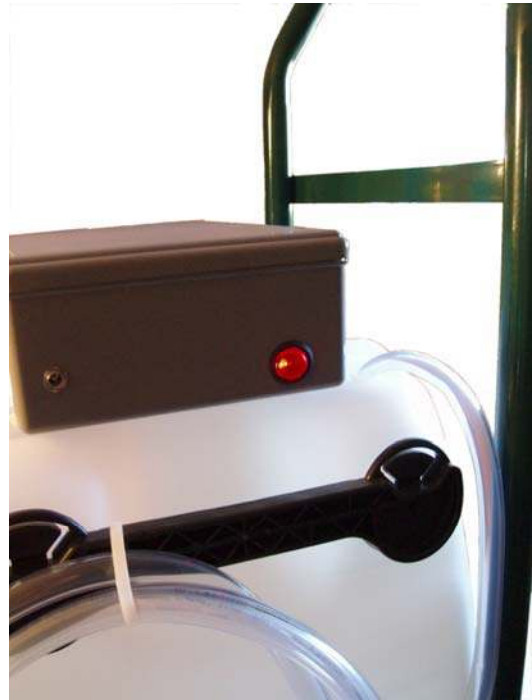

Specification

Battery

12Volt DC Sealed Re-Chargeable Battery

Charger

120AC to 12Volt DC

Submersible Pump

Max: 14PSI

Dimensions

Tank: 13" x 14" x 28"

Hose: Output Tubing I.D. 3/8" 6ft - Flow Indicator and All-In-One Coupler Female

Watering an *entire battery* with AquaPro takes less time than watering one *cell manually*.

AquaPro®
the rapid multi pressure system

Contact: